


# 12mm Pipe Inspection Camera System

**SUBSURFACE  
INSTRUMENTS, INC**

Premier developer, manufacturer and distributor of high frequency and magnetic locators, PVC pipe detectors, PE Pipe, metallic pipe, cable and custom specialty locators.

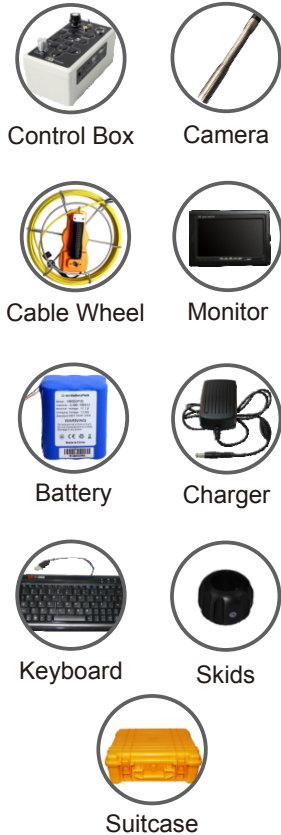

Camera Head	
Camera Size:	ø12mmX125mm
Sensor size:	1/4 inch
View angle:	65°
Work current/power:	DC12V
Camera light:	6PCS white LEDS
Resolution:	PAL: 720X576 NTSC: 720X480
Glass material:	Sapphire glass
Shell material:	stainless steel
Water proof:	IP68

Cable Wheel	
Cable size:	ø330mmX110(h)
Wire material:	Fiberglass rod
Wire length:	40m
Wire diameter:	ø5.0mm

Monitor	
Size:	9inch TFT
Total Pixels:	800X480
Work current/supply:	DC12V
OSD language:	English
Image reversible	
Model:	16:9 & 4:3
Sunshade	

Li-ion Battery	
Battery capacity:	4400 MAH
Work supply:	12.6V
Charge time:	5 Hours
Protective voltage:	9.3V
Work time:	≥420minutes

Suitcase	
Size:	L511XW430XH200mm
Material:	Engineering plastic

Control Box	
Power supply:	12V
Work current:	150MA
Storage medium:	SD card(max 256G) SD card reader
Battery level display	
Picture snap & movie record	.jpg .mp4
DVR Total Pixels:	720X576 (D1)
Movie format:	MP4
Microphone Audio record	
Stereo earphone output	

Charger	
Input:	AC100-240V~50/60Hz
Output:	DC 12.6V/1000MA
DC plug diameter:	2.1mm

Skid	
Skid	ø 18mm



**SubSurface Instruments, Inc.** | 1230 Flightway Drive, De Pere, WI. 54115  
toll free: 855.422.6346 | Website: [www.ssilocators.com](http://www.ssilocators.com) | email: [info@ssilocators.com](mailto:info@ssilocators.com)

Updated 07/26/2018

